


FORD TRUCKS 1833 LR EURO6

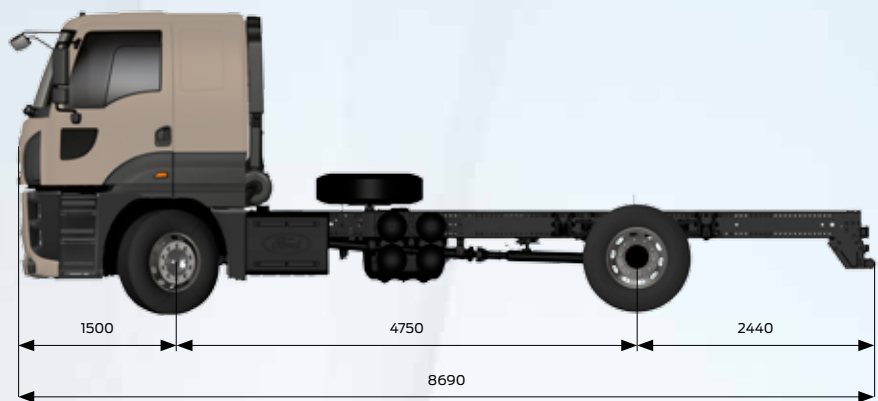

Basic Features

Vehicle Type	Light Road Truck
Axle	4x2
Emission	Euro 6
Cabin Type	Sleeper Cab
Wheelbase (mm)	4750

Engine

Type	Ecotorq 9 liters
Displacement (cc)	8974
Diameter x Stroke	115 mm x 144 mm
Power	330 PS (243 kW) @ 1900 rpm
Torque	1300 Nm @ 1200-1700 rpm
Compression Ratio	17,6 : 1
Oil Filling Volume	30 L
Coolant Volume	35 L

Transmission

Clutch	430 mm Single Disc
Manuel Transmission / Ratios (1. gear - 9. gear)	ZF 9S1310 (9,48 - 0,75)

Steering

Hema ZF 8098 servocom

Chassis

Chassis Thickness	7 mm
Chassis Strength	355 MPa
Suspension (Front/Rear)	Parabolic Leaf Spring / Multi-Leaf Spring
Axle	Standard Single Reduction
Axle Ratio	4,63
Tyres	12 R 22,5
Wheel Rim	22,5 x 9 Steel

Braking System

Brakes (Front/Rear) (Ø.mm x mm. Length)	430 x 45 - Disc Brake
Braking System	Dual Brake Circuit, Air Processing Unit With Integrated Oil Separator and Heater
Engine Brake Power	max 220 kW (Engine Level)

Electrical System

Battery	24V, 2 x 12V 150 Ah
Alternator / Starter Motor	130 A / 6,5 kW

Tanks

Fuel Tank	350 L Aluminium
SCR Tank	55 L

Dimensions (mm)				
Front Overhang		1500		
Wheelbase		4750		
Overall Length		8690		
Overall Cab Length		2305		
Overall Vehicle Height		3140		
Overall Vehicle Width (Excluding Mirrors)		2540		
Chassis Width		866		
Rear Overhang		2440		
Useful Chassis Length		5937		
Chassis Height - Front		225		
Chassis Height - Rear		285		
Ground Clearance Front		356		
Ground Clearance Rear		352		
Turning Radius		8400		
Weights (kg)		1. Axle	2. Axle	Total
Technically Permissible Weights		7100	12600	18000
Kerb Weight		4342	2401	6743
Payload		2758	10199	11257
Gross Vehicle Mass (Legal)		7100	11500	18000

STANDARD EQUIPMENT


- Air Conditioner
- Radio/CD/MP3 Player
- Auxiliary Cabin Heater (Dry Type)
- Cruise Control
- Disc Brake
- Engine Brake
- Electronic Brake System (EBS) and Anti-Lock Brake System (ABS)
- Electronic Stability Control (ESP)
- Lane Departure Warning System (LDWS)
- Hill Launch Assist
- Differential Lock
- Electrically Operated Windows
- Electrically Operated and Heated Side Mirrors
- Electrically Operated Headlight Leveling
- Rake and Reach Adjustable Steering Column
- Heated and Air Suspended Driver Seat
- Lumbar Support
- Manually Operated Sunroof
- Brake Lining Wear Sensor
- Immobilizer
- Single Key with Remote Control and Central Locking
- Rain Sensor
- Auto Light Sensor
- Home Safe Light
- Approach Light
- Front Fog Lamps
- Digital Tachograph
- Spare Wheel

OPTIONAL EQUIPMENT

- Firefighter Pack
- Transmission Driven PTO Options & Interior Control Unit
- Engine Driven PTO & Interior Control Unit *
- ADR
- Cold Climate Pack
- Auxiliary Cabin Heater (Wet Type)
- Aluminium Alloy Wheel Rims
- Power Cab Tilting
- Metallic Paint/Special Colors
- 4250 mm Wheelbase Option
- Advanced Emergency Braking System (AEBS)
- Rear Air Suspension Package - with 5500 mm Wheelbase Option, Axle Load Indicator, 315/60 Wheel, 4,11 FDR and AEBS

* Available for Firefighter Pack only.

FORD TRUCKS 1833 LR EURO5

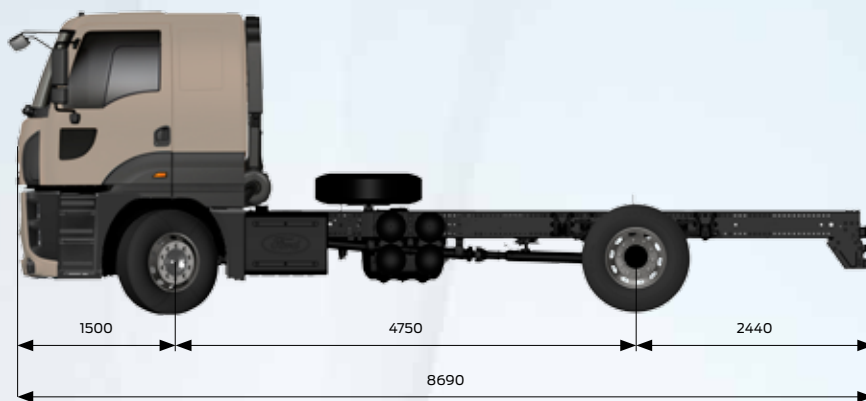

Basic Features

Vehicle Type	Light Road Truck
Axle	4x2
Emission	Euro 5
Cabin Type	Day Cab
Wheelbase (mm)	4750

Engine

Type	Ecotorq 9 liters
Displacement (cc)	8974
Diameter x Stroke	115 mm x 144 mm
Power	330 PS (243 kW) @ 1900 rpm
Torque	1300 Nm @ 1200-1700 rpm
Compression Ratio	17,6 : 1
Oil Filling Volume	30 L
Coolant Volume	35 L

Transmission

Clutch	430 mm Single Disc
Manuel Transmission / Ratios (1. gear - 9. gear)	ZF 9S1310 (9,48 - 0,75)

Steering

Hema ZF 8098 servocom

Chassis

Chassis Thickness	7 mm
Chassis Strength	355 MPa
Suspension (Front / Rear)	Parabolic Leaf Spring / Multi Leaf Spring
Axle	Standard Single Reduction
Axle Ratio	4,63
Tyres	12 R 22,5
Wheel Rim	22,5 x 9 Steel

Braking System

Brakes (Front / Rear) (Ø.mm x mm. Length)	430 x 45 - Disc Brake
Braking System	Dual Brake Circuit - Air Processing Unit with Integrated Oil Separator and Heater
Engine Brake Power	max. 180 kW (Engine Level)

Electrical System

Battery	24V, 2 x 12V 150 Ah
Alternator / Starter Motor	130 A / 6,5 kW

Tanks

Fuel Tank	350 L Aluminium
SCR Tank	55 L

Dimensions (mm)				
Front Overhang		1500		
Wheelbase		4750		
Overall Length		8690		
Overall Cab Length		2305		
Overall Vehicle Height		3140		
Overall Vehicle Width (Excluding Mirrors)		2540		
Chassis Width		866		
Rear Overhang		2440		
Useful Chassis Length		5937		
Chassis Height - Front		225		
Chassis Height - Rear		285		
Ground Clearance - Front		356		
Ground Clearance - Rear		352		
Turning Radius		8400		
Weights (kg)		1. Axle	2. Axle	Total
Technically Permissible Weights		7100	12600	18000
Kerb Weight		4342	2401	6743
Payload		2758	10199	11257

STANDARD EQUIPMENT


- Radio/CD/MP3 Player
- Cruise Control
- Auxiliary Cabin Heater (Dry Type)
- Disc Brake
- Engine Brake
- Electronic Brake System (EBS) and Anti-Lock Brake System (ABS)
- Electronic Stability Control (ESP)
- Hill Launch Assist
- Electrically Operated Windows
- Electrically Operated and Heated Side Mirrors
- Electrically Operated Headlight Leveling
- Rake and Reach Adjustable Steering Column
- Heated and Air Suspended Driver Seat
- Lumbar Support
- Manually Operated Sunroof
- Brake Lining Wear Sensor
- Immobilizer
- Differential Lock
- Single Key with Remote Control and Central Locking
- Home Safe Light
- Approach Light
- Front Fog Lamps
- Spare Wheel
- Digital Tachograph

OPTIONAL EQUIPMENT

- Air Conditioner
- Firefighter Pack
- Transmission Driven PTO Options & Interior Control Unit
- Engine Driven PTO & Interior Control Unit *
- ADR Pack
- Cold Climate Pack
- Auxiliary Cabin Heater (Wet Type)
- Aluminium Alloy Wheels
- Power Cab Tilting
- Metallic Paint / Special Colors
- 4250 mm Wheelbase Option
- Rain Sensor
- Auto Light Sensor

* Available for Firefighter Pack Only

FORD TRUCKS 1833 LR EURO3

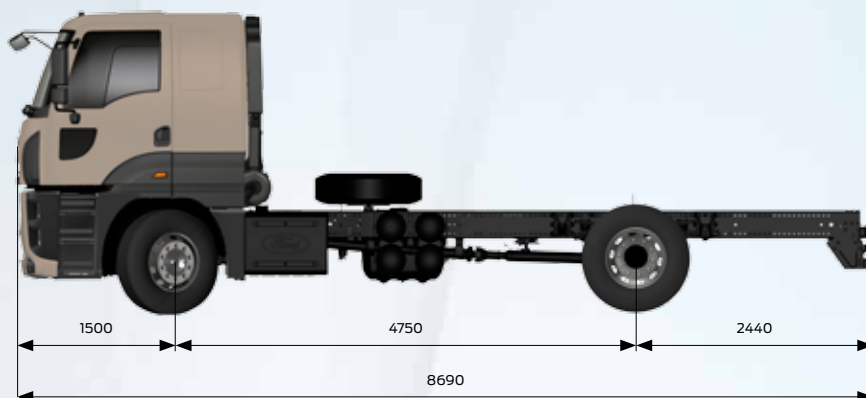

Basic Features

Vehicle Type	Light Road Truck
Axle	4x2
Emission	Euro 3
Cabin Type	Sleeper Cab
Wheelbase (mm)	4750

Engine

Type	Ecotorq 9 liters
Displacement (cc)	8974
Diameter x Stroke	115 mm x 144 mm
Power	330 PS (243 kW) @ 1900 rpm
Torque	1300 Nm @ 1200-1700 rpm
Compression Ratio	17,6 : 1
Oil Filling Volume	30 L
Coolant Volume	35 L

Transmission

Clutch	430 mm Single Disc
Manuel Transmission / Ratios (1. gear - 9. gear)	ZF 9S1310 (9,48 - 0,75)

Steering

Hema ZF 8098 servocom

Chassis

Chassis Thickness	7 mm
Chassis Strength	355 MPa
Suspension (Front / Rear)	Parabolic Leaf Spring / Multi Leaf Spring
Axle	Standard Single Reduction
Axle Ratio	4,63
Tyres	12 R 22,5
Wheel Rim	22,5 x 9 Steel

Braking System

Brakes (Front / Rear) (Ø.mm x mm. Length)	430 x 45 - Disc Brake
Braking System	Dual Brake Circuit - Air Processing Unit with Integrated Oil Separator and Heater
Engine Brake Power	max. 180 kW (Engine Level)

Electrical System

Battery	24 V, 2 x 12 V 150 Ah
Alternator / Starter Motor	130 A / 6,5 kW

Tanks

Fuel Tank	350 L Aluminium
-----------	-----------------

Dimensions (mm)				
Front Overhang		1500		
Wheelbase		4750		
Overall Length		8690		
Overall Cab Length		2305		
Overall Vehicle Height		3140		
Overall Vehicle Width (Excluding Mirrors)		2540		
Chassis Width		866		
Rear Overhang		2440		
Useful Chassis Length		5937		
Chassis Height - Front		225		
Chassis Height - Rear		285		
Ground Clearance - Front		356		
Ground Clearance - Rear		352		
Turning Radius		8400		
Weights (kg)		1. Axle	2. Axle	Total
Technically Permissible Weights		7100	12600	18000
Kerb Weight		4342	2401	6743
Payload		2758	10199	11257

STANDARD EQUIPMENT

- Radio/CD/MP3 Player
- Cruise Control
- Auxiliary Cabin Heater (Dry Type)
- Disc Brake
- Engine Brake
- Electronic Brake System (EBS) and Anti-Lock Brake System (ABS)
- Electronic Stability Control (ESP)
- Hill Launch Assist
- Differential Lock
- Electrically Operated Windows
- Electrically Operated and Heated Side Mirrors
- Electrically Operated Headlight Levelling
- Rake and Reach Adjustable Steering Column
- Heated and Air Suspended Driver Seat
- Lumbar Support
- Manually Operated Sunroof
- Brake Lining Wear Sensor
- Immobilizer
- Single Key with Remote Control and Central Locking
- Home Safe Light
- Approach Light
- Front Fog Lamps
- Tachograph
- Spare Wheel

OPTIONAL EQUIPMENT

- Air Conditioner
- Firefighter Pack
- Transmission Driven PTO Options & Interior Control Unit
- Engine Driven PTO & Interior Control Unit *
- ADR Pack
- Cold Climate Pack
- Auxiliary Cabin Heater (Wet Type)
- Aluminium Alloy Wheels
- Power Cab Tilting
- Metallic Paint / Special Colors
- 4250 mm Wheelbase Option
- Digital Tachograph
- Rain Sensor
- Auto Light Sensor

* Available for Firefighter Pack Only.