


# FORD TRUCKS 2533D LR EURO6

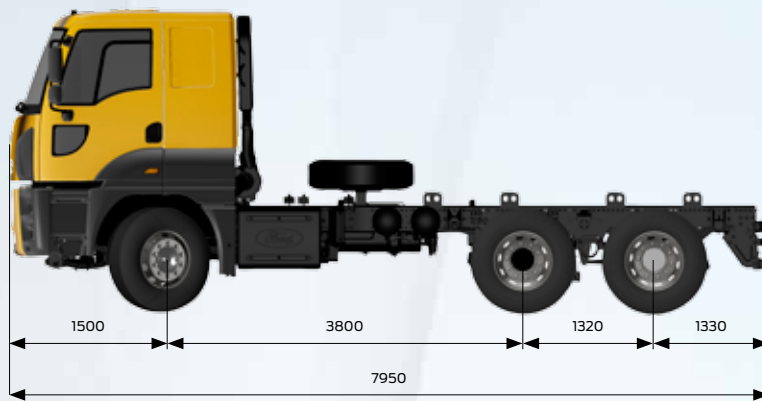

## Basic Features

Vehicle Type	Light Tipper
Axle	6x2
Emission	Euro 6
Cabin Type	Low Roof Sleeper Cab
Wheelbase (mm)	3800

## Engine

Type	Ecotorq 9 liters
Displacement (cc)	8974
Diameter x Stroke	115 mm x 144 mm
Power	330 PS (243 kW) @ 1900 rpm
Torque	1300 Nm @ 1200-1700 rpm
Compression Ratio	17,6 : 1
Oil Filling Volume	30 L
Coolant Volume	35 L

## Transmission

Clutch	430 mm Single Disc
Manuel Transmission / Ratios (1.gear - 9. gear)	ZF 9S1310 (9,48 - 0,75)

## Steering

Hema ZF 8098 servocom

## Chassis

Chassis Thickness	7 mm with Reinforcement
Chassis Strength	355 MPa
Suspension (Front/Rear)	Parabolic Leaf Spring / Compensating Arm Mechanical Suspension
Axle	Standard Single Reduction
Axle Ratio	4,63
Tyres	315/80 R 22,5
Wheel Rim	22,5 x 9 Steel

## Braking System

Brakes (Front/Rear) (Ø.mm x mm. Length)	410 mm x 200mm, Z-Cam Drum Brake
Braking System	Dual Braking System - Air Processing Unit with Integrated Oil Separator and Heater
Engine Brake Power	max. 220 kW (Engine Level)

## Electrical System

Battery	24V, 2 x 12V 150 Ah
Alternator / Starter Motor	130 A / 6,5 kW

## Tanks

Fuel Tank	315 L Steel
SCR Tank	55 L

Dimensions (mm)	
Front Overhang	1500
Wheelbase	3800
Overall Length	7940
Distance Between 2 <sup>nd</sup> and 3 <sup>th</sup> Wheel Centers	1320
Overall Cab Length	3120
Overall Vehicle Height	2305
Overall Vehicle Width (Excluding Mirrors)	2540
Chassis Width	770
Rear Overhang	1330
Useful Chassis Length	5330
Chassis Height-Front	225
Chassis Height-Rear	285
Ground Clearance-Front	324
Ground Clearance-Rear	360
Turning Radius	8790

Weights (kg)	1. Axle	2. Axle	3. Axle	Total
Technically Permissible Weights	7100	12600	10900	26000
Kerb Weight	4982	2150	1587	8719
Payload	2118	10450	9313	17281
GVM (Legal)	7100	11500	10000	25000

### STANDARD EQUIPMENT


- Air Conditioner
- Auxiliary Cabin Heater (Dry Type)
- Radio/CD/MP3 Player
- NH1-C Transmission Driven PTO and Interior Control Unit
- Cruise Control
- Engine Brake
- Drum Brake
- Electronic Brake System (EBS) and Anti-Lock Brake System (ABS)
- Electronic Stability Control (ESP)
- Lane Departure Warning System (LDWS)
- Hill Launch Assist
- Electrically Operated Windows
- Electrically Operated and Heated Side Mirrors
- Electrically Operated Headlight Leveling
- Rake and Reach Adjustable Steering Column
- Heated and Air Suspended Driver Seat
- Lumbar Support
- Manually Operated Sunroof
- Brake Pad Wear Indicator
- Immobilizer
- Single Key with Remote Control and Central Locking
- Rain Sensor
- Auto Light Sensor
- Home Safe Light
- Approach Light
- Digital Tachograph
- Spare Wheel
- Tag Axle Lifting (Auto Drop Function)
- Differential Lock
- Short Bumper

### OPTIONAL EQUIPMENT

- Firefighter Pack
- Engine Driven PTO & Interior Control Unit \*
- Transmission Driven PTO Options & Interior Control Unit
- ADR
- Cold Climate Pack
- Auxiliary Cabin Heater (Wet Type)
- Aluminium Alloy Wheels
- Power Cab Tilting
- Metallic Paint / Special Colors
- Advanced Emergency Braking System (AEBS)

\* Available for Firefighter Pack Only

# FORD TRUCKS 2533D LR EURO5

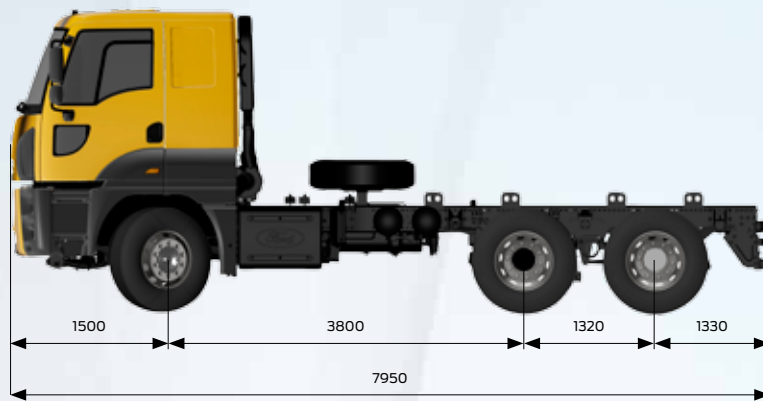

## Basic Features

Vehicle Type	Light Tipper
Axle	6x2
Emission	Euro 5
Cabin Type	Low Roof Sleeper Cab
Wheelbase (mm)	3800

## Engine

Type	Ecotorq 9 liters
Displacement (cc)	8974
Diameter x Stroke	115 mm x 144 mm
Power	330 PS (243 kW) @ 1900 rpm
Torque	1300 Nm @ 1200-1700 rpm
Compression Ratio	17,6 : 1
Oil Filling Volume	30 L
Coolant Volume	35 L

## Transmission

Clutch	430 mm Single Disc
Manuel Transmission / Ratios (1.gear - 9. gear)	ZF 9S1310 (9,48 - 0,75)

## Steering

Hema ZF 8098 servocom

## Chassis

Chassis thickness	7 mm with Reinforcement
Chassis strength	355 MPa
Suspension (Front / Rear)	Parabolic Leaf Spring / Compensating Arm Mechanical Suspension
Axle	Standard Single Reduction
Axle Ratio	4,63
Tyres	315/80 R 22.5
Wheel Rim	22,5 x 9 Steel

## Braking System

Brakes (Front / Rear) (Ø.mm x mm. Length)	410 mm x 200 mm, Z-Cam Drum Brake
Braking System	Dual Brake Circuit - Air Processing Unit with Integrated Oil Separator and Heater Engine Brake
Engine Brake Power	max. 180 kW (Engine Level)

## Electrical System

Battery	24 V, 2 x 12 V 150 Ah
Alternator / Starter Motor	130 A / 6,5 kW

## Tanks

Fuel Tank	315 L Steel
SCR Tank	55 L

Dimensions (mm)	
Front Overhang	1500
Wheelbase	3800
Overall Length	7940
Distance Between 2 <sup>nd</sup> and 3 <sup>th</sup> Wheel Centers	1320
Overall Cab Length	3120
Overall Vehicle Height	2305
Overall Vehicle Width (Excluding Mirrors)	2540
Chassis Width	770
Rear Overhang	1330
Useful Chassis Length	5330
Chassis Height - Front	225
Chassis Height - Rear	285
Ground Clearance - Front	324
Ground Clearance - Rear	360
Turning Radius	8790

Weights (kg)	1. Axle	2. Axle	3. Axle	Total
Technically Permissible Weights	7100	12600	10900	26000
Kerb Weight	4910	2140	1578	8628
Payload	2190	10460	9322	17372

### STANDARD EQUIPMENT


- Radio/CD/MP3 Player
- NH1-C Transmission Driven PTO and Interior Control Unit
- Cruise Control
- Engine Brake
- Drum Brake
- Electronic Brake System (EBS) and Anti-Lock Brake System (ABS)
- Electronic Stability Control (ESP)
- Hill Launch Assist
- Electrically Operated Windows
- Electrically Operated and Heated Side Mirrors
- Electrically Operated Headlight Leveling
- Rake and Reach Adjustable Steering Column
- Heated and Air Suspended Driver Seat
- Lumbar Support
- Manually Operated Sunroof
- Brake Pad Wear Indicator
- Immobilizer
- Single Key with Remote Control and Central Locking
- Home Safe Light
- Approach Light
- Digital Tachograph
- Differential Lock
- Short Bumper

### OPTIONAL EQUIPMENT

- Air Conditioner
- Firefighter Pack
- Engine Driven PTO & Interior Control Unit \*
- Transmission Driven PTO Options & Interior Control Unit
- ADR Pack
- Cold Climate Pack
- Auxiliary Cabin Heater (Wet Type)
- Auxiliary Cabin Heater (Dry Type)
- Rain Sensor
- Auto Light Sensor
- Aluminium Alloy Wheels
- Power Cab Tilting
- Metallic Paint / Special Colors

\* Available for Fire Fighters

# FORD TRUCKS 2533D LR EURO3

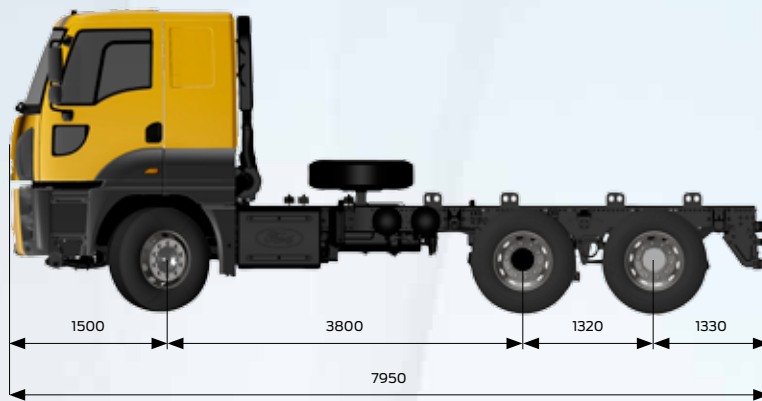

## Basic Features

Vehicle Type	Light Tipper
Axle	6x2
Emission	Euro 3
Cabin Type	Low Roof Sleeper Cab
Wheelbase (mm)	3800

## Engine

Type	Ecotorq 9 liters
Displacement (cc)	8974
Diameter x Stroke	115 mm x 144 mm
Power	330 PS (243 kW) @ 1900 rpm
Torque	1300 Nm @ 1200-1700 rpm
Compression Ratio	17,6 : 1
Oil Filling Volume	30 L
Coolant Volume	35 L

## Transmission

Clutch	430 mm Single Disc
Manuel Transmission / Ratios (1. gear - 9. gear)	ZF 9S1310 (9,48 - 0,75)

## Steering

Hema ZF 8098 servocom

## Chassis

Chassis Thickness	7 mm with Reinforcement
Chassis Strength	355 MPa
Suspension (Front / Rear)	Parabolic Leaf Spring / Compensating Arm Mechanical Suspension
Axle	Standard Single Reduction
Axle Ratio	4,63
Tyres	315/80 R 22,5
Wheel Rim	22,5 x 9 Steel

## Braking System

Brakes (Front / Rear) (Ø.mm x mm. Length)	410 x 200, Z-Cam Drum Brake
Dual Brake Circuit	Dual Brake Circuit - Air Processing Unit with Integrated Oil Seperator and Heater
Engine Brake Power	max. 180 kW (Engine Level)

## Electrical System

Battery	24 V, 2 x 12 V 150 Ah
Alternator / Starter Motor	130 A / 6,5 kW

## Tanks

Fuel Tank	315 L Steel
-----------	-------------

Dimensions (mm)	
Front Overhang	1500
Wheelbase	3800
Overall Length	7940
Distance Between 2 <sup>nd</sup> and 3 <sup>th</sup> Wheel Centers	1320
Overall Cab Length	3120
Overall Vehicle Height	2305
Overall Vehicle Width (Excluding Mirrors)	2540
Chassis Width	770
Rear Overhang	1330
Useful Chassis Length	5330
Chassis Height - Front	225
Chassis Height - Rear	285
Ground Clearance - Front	324
Ground Clearance - Rear	360
Wall to Wall Turning Circle Radius	8790

Weights (kg)	1. Axle	2. Axle	3. Axle	Total
Technically Permissible Weights	7100	12600	10900	26000
Kerb Weight	4804	2128	1565	8497
Payload	2296	10472	9335	17503

### STANDARD EQUIPMENT

- Radio/CD/MP3 Player
- NH1-C Transmission Driven PTO and Interior Control Unit
- Cruise Control
- Engine Brake
- Drum Brake
- Electronic Brake System (EBS) and Anti-Lock Brake System (ABS)
- Electronic Stability Control (ESP)
- Hill Launch Assist
- Electrically Operated Windows
- Electrically Operated and Heated Side Mirrors
- Electrically Operated Headlight Levelling
- Rake and Reach Adjustable Steering Column
- Heated and Air Suspended Driver Seat
- Lumbar Support
- Manually Operated Sunroof
- Brake Pad Wear Indicator
- Immobilizer
- Single Key with Remote Control and Central Locking
- Home Safe Light
- Approach Light
- Tachograph
- Differential Lock
- Short Bumper

### OPTIONAL EQUIPMENT

- Air Conditioner
- Firefighter Pack
- Engine Driven PTO & Interior Control Unit \*
- Transmission Driven PTO Options & Interior Control Unit
- ADR Pack
- Cold Climate Pack
- Auxiliary Cabin Heater (Wet Type)
- Auxiliary Cabin Heater (Dry Type)
- Rain Sensor
- Auto Light Sensor
- Aluminium Alloy Wheels
- Power Cab Tilting
- Metallic Paint / Special Colors
- Digital Tachograph

\* Available for Firefighter Pack Only

This leaflet includes products designed for Ford vehicles. It provides information about the current technical specifications and the standard or optional accessories available as of the date it was issued. Features of standard and optional accessories of the vehicles may be changed from time to time. For this reason, please consult our Authorized Dealers to obtain updated and accurate information on the features of the vehicle you wish to buy. For the aforementioned reason, this leaflet does not constitute an assurance as to the specifications listed herein. The images used in this leaflet may be different from the vehicles on sale. The technical specifications provided herein are for standard vehicles. Selection of any optional accessories might cause differences from these specifications.