
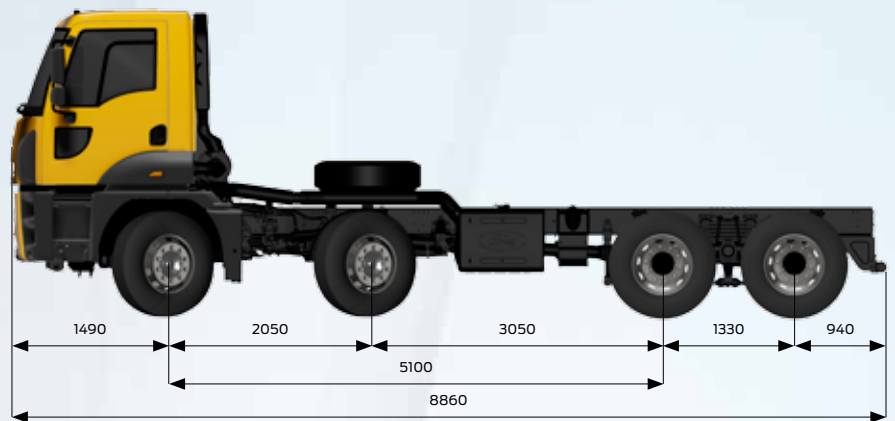


FORD TRUCKS 4142P EURO6

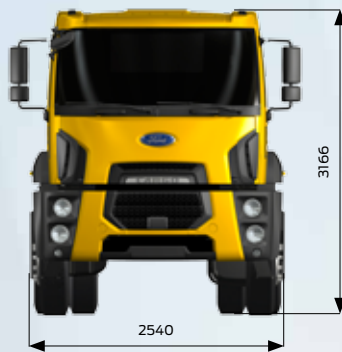

Basic Features

Vehicle Type	Concrete Pump
Axle	8x4
Emission	Euro 6
Cabin Type	Day Cab
Wheelbase (mm)	5100

Engine

Type	Ecotorq 12,7 liters
Displacement (cc)	12740
Bore x Stroke	130 mm x 160 mm
Power	420 PS (308,9 kW) / 1800 rpm
Torque	2150 Nm / 1000-1300 rpm
Compression Ratio	17 +/- 0,5 : 1
Oil Filling Volume	50 L
Coolant Volume	37 L (57 L with Intarder)

Transmission

Clutch	430 mm Single Disc
Manuel Transmission / Ratios (1. gear - 16. gear)	ZF 16S 2230 (13,805-0,836)

Steering

Hema ZF 8098 Servocom

Chassis

Chassis Thickness	10 mm
Chassis Strength	500 MPa
Suspension (Front / Rear)	90 mm Parabolic Leaf Springs / 100 mm Parabolic Tandem Suspension
Axle	Hub Reduction
Axle Ratio	4,08
Tyres	315/80 R 22,5
Wheel Rim	22,5 x 9 Steel

Braking System

Brakes (Ø mm x mm Length)	410 X 200, Z-Cam Brake System
Braking System	Dual Brake Circuit – Air Processing Unit with Integrated Oil Separator and Heater
Engine Brake Power	max. 340 kW (Engine Level)
Intarder Power	max. 600 kW / continuous 160 kW

Electrical System

Battery	24V, 2 x 12V 150 Ah
Alternator / Starter Motor	130 A / 6,5 kW

Tanks

Fuel Tank	315 L Steel
SCR Tank	55 L

Dimensions (mm)

Front Overhang	1490
Wheelbase	5100
Overall Length	8860
Distance Between 1 st and 2 nd Wheel Centers	2050
Distance Between 2 nd and 3 th Wheel Centers	3050
Distance Between 3 th and 4 th Wheel Centers	1330
Overall Cab Length	1820
Total Vehicle Height	3166
Overall Vehicle Width (Excluding Mirrors)	2540
Chassis Width	770
Rear Overhang	940
Useful Chassis Length	6490
Chassis Height - Front	225
Chassis Height - Rear	285
Ground Clearance - Front	423
Ground Clearance - Rear	300
Turning Radius	11930

Weights (kg)	1. Axle	2. Axle	3. Axle	4. Axle	Total
Technically Permissible Weights	7500	7500	13400	13400	39000
Kerb Weight	3616	3487	2177	2157	11437
Payload	3884	4013	11223	11243	27563
GVM (Legal)	7500	7500	9500	9500	32000

STANDARD EQUIPMENT


- Air conditioner
- Radio/CD Player
- Cruise Control
- Engine Brake
- Drum Brake
- Electrically Operated Windows
- Electrically Operated and Heated Side Mirrors
- Electrically Operated Headlamp Leveling
- Rake and Reach Adjustable Steering Column
- Heated and Air Suspended Driver Seat
- Lumbar Support
- Manual Operated Sunroof
- Front and Rear Vehicle Antiroll Bars
- Anti-Lock Brake System (ABS)
- Brake Lining Wear Indicator
- Immobilizer
- Single Key with Remote Control and Central Locking
- Home Safe Light
- Approach Light
- Differential Lock
- Digital Tachograph
- Switchable Air Compressor for Improved Fuel Economy
- Rear Window
- Short Bumper

OPTIONAL EQUIPMENT

- 6000 mm Wheelbase Option
- Aluminium Alloy Wheel Rims
- Intarder
- ADR Pack
- Wet Type Cab Heater *
- Cold Pack with Wet Type Cab Heater
- Power Cab Tilting
- Transmission Driven PTO Options & Interior Control Unit
- Engine Driven PTO & Interior Control Unit
- Automatic Traction Control (ATC)

* Available with 6000mm Wheelbase Option

FORD TRUCKS 4142P EURO5

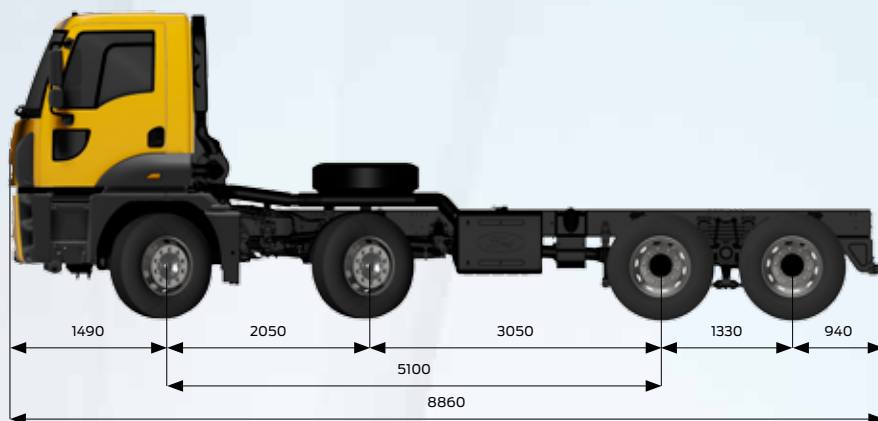

Basic Features

Vehicle Type	Concrete Pump
Axle	8x4
Emission	Euro 5
Cabin Type	Day Cab
Wheelbase (mm)	5100

Engine

Type	Ecotorq 12,7 litres
Displacement (cc)	12740
Bore x Stroke	130 mm x 160 mm
Power	420 PS (308,9 kW) / 1800 rpm
Torque	2150 Nm / 1000-1300 rpm
Compression Ratio	17 +/- 0,5 : 1
Oil Filling Volume	50 L
Coolant Volume	37 L (57 L with Intarder)

Transmission

Clutch	430 mm Single Disc
Manuel Transmission / Ratios (1. gear - 16. gear)	ZF 16S 2230 (13,805-0,836)

Steering

Hema ZF 8098 Servocom

Chassis

Chassis Thickness	10 mm with Reinforcement
Chassis Strength	500 MPa
Suspension (Front / Rear)	90 mm Parabolic Leaf Springs / 100 mm Parabolic Tandem Suspension
Axle	Hub Reduction
Axle Ratio	4,08
Tyres	315/80 R 22,5
Wheel Rim	22,5 x 9 Steel

Braking System

Brakes (Ø mm x mm Length)	410 x 200, Z-Cam Brake System
Braking System	Dual Brake Circuit - Air Processing Unit with Integrated Oil Separator and Heater
Engine Brake Power	max. 340 kW (Engine Level)
Intarder Power	max. 600 kW / continuous 160 kW

Electrical System

Battery	24 V, 2 x 12 V 150 Ah
Alternator / Starter Motor	130 A / 6,5 kW

Tanks

Fuel Tank	315 L Steel
SCR Tank	55 L

Dimensions (mm)

Front Overhang	1490
Wheelbase	5100
Overall Length	8860
Distance Between 1 st and 2 nd Wheel Centers	2050
Distance Between 2 nd and 3 th Wheel Centers	3050
Distance Between 3 th and 4 th Wheel Centers	1330
Overall Cab Length	1820
Total Vehicle Height	3166
Overall Vehicle Width (Excluding Mirrors)	2540
Chassis Width	770
Rear Overhang	940
Useful Chassis Length	6490
Chassis Height - Front	225
Chassis Height - Rear	285
Ground Clearance - Front	423
Ground Clearance - Rear	300
Turning Radius	11930

Weights (kg)	1. Axle	2. Axle	3. Axle	4. Axle	Total
Technically Permissible Weights	7500	7500	13400	13400	39000
Kerb Weight	3712	3749	1825	1825	11111
Payload	3788	3751	11575	11575	27889



STANDARD EQUIPMENT

- Radio/CD Player
- Cruise Control
- Engine Brake
- Drum Brake
- Electrically Operated Windows
- Electrically Operated and Heated Side Mirrors
- Electrically Operated Headlamp Levelling
- Rake and Reach Adjustable Steering Column
- Heated and Air Suspended Driver Seat
- Lumbar Support
- Manually Operated Sunroof
- Front and Rear Vehicle Antiroll Bar
- Anti-lock Brake System (ABS)
- Brake Lining Wear Indicator
- Immobilizer
- Single Key with Remote Control and Central Locking
- Home Safe Light
- Approach Light
- Differential Lock
- Switchable Air Compressor for Improved Fuel Economy
- Digital Tachograph
- Rear Window
- Short Bumper

OPTIONAL EQUIPMENT

- Air Conditioner
- 6000 mm Wheelbase Version
- Aluminium Alloy Wheel
- Intarder
- ADR Pack
- Wet Type Cab Heater
- Cold Pack with Wet Type Cab Heater
- Power Cab Tilting
- Transmission Driven PTO Options & Interior Control Unit
- Engine Driven PTO & Interior Control Unit
- Automatic Traction Control

FORD TRUCKS 4142P EURO3

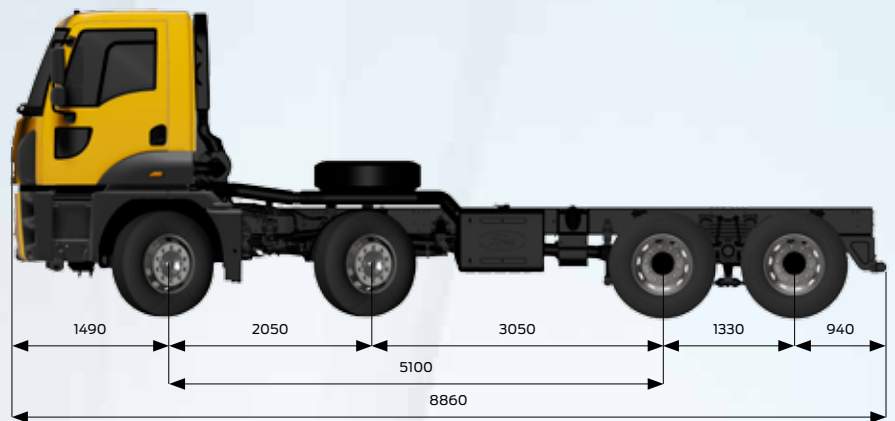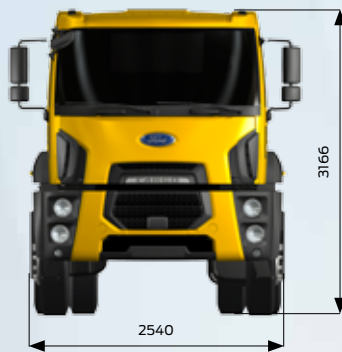

Basic Features

Vehicle Type	Concrete Pump
Axle	8x4
Emission	Euro 3
Cabin Type	Day Cab
Wheelbase (mm)	5100

Engine

Type	Ecotorq 12,7 litres
Displacement (cc)	12740
Bore x Stroke	130 mm x 160 mm
Power	420 PS (308,9 kW) / 1800 rpm
Torque	2150 Nm / 1000-1300 rpm
Compression Ratio	17 +/- 0,5 : 1
Oil Filling Volume	50 L
Coolant Volume	37 L (57 L with Intarder)

Transmission

Clutch	430 mm Single Disc
Manuel Transmission / Ratios (1. gear - 16. gear)	ZF 16S 2230 (13,805-0,836)

Steering

Hema ZF 8098 Servocom

Chassis

Chassis Thickness	10 mm with Reinforcement
Chassis Strength	500 MPa
Suspension (Front / Rear)	90 mm Parabolic Leaf Springs / 100 mm Parabolic Tandem Suspension
Axle	Hub Reduction
Axle Ratio	4,08
Tyres	315/80 R 22,5
Wheel Rim	22,5 x 9 Steel

Braking System

Brakes (Ø mm x mm Length)	410 x 200, Z-Cam Brake System
Braking System	Dual Brake Circuit - Air Processing Unit with Integrated Oil Separator and Heater
Engine Brake Power	max. 340 kW (Engine Level)
Intarder Power	max. 600 kW / continuous 160 kW

Electrical System

Battery	24 V, 2 x 12 V 150 Ah
Alternator / Starter Motor	130 A / 6,5 kW

Tanks

Fuel Tank	315 L Steel
-----------	-------------

Dimensions (mm)

Front Overhang	1490
Wheelbase	5100
Overall Length	8860
Distance Between 1 st and 2 nd Wheel Centers	2050
Distance Between 2 nd and 3 th Wheel Centers	3050
Distance Between 3 th and 4 th Wheel Centers	1330
Overall Cab Length	1820
Total Vehicle Height	3166
Overall Vehicle Width (Excluding Mirrors)	2540
Chassis Width	770
Rear Overhang	940
Useful Chassis Length	6490
Chassis Height - Front	225
Chassis Height - Rear	285
Ground Clearance - Front	423
Ground Clearance - Rear	300
Turning Radius	11930

Weights (kg)

	1. Axle	2. Axle	3. Axle	4. Axle	Total
Technically Permissible Weights	7500	7500	13400	13400	39000
Kerb Weight	3671	3709	1799	1799	10978
Payload	3829	3791	11601	11601	28022

STANDARD EQUIPMENT

- Radio/CD Player
- Cruise Control
- Engine Brake
- Drum Brake
- Electrically Operated Windows
- Electrically Operated and Heated Side Mirrors
- Electrically Operated Headlamp Levelling
- Rake and Reach Adjustable Steering Column
- Heated and Air Suspended Driver Seat
- Lumbar Support
- Manually Operated Sunroof
- Front and Rear Vehicle Antiroll Bar
- Anti-Lock Brake System (ABS)
- Brake Lining Wear Indicator
- Immobilizer
- Single Key with Remote Control and Central Locking
- Home Safe Light
- Approach Light
- Differential Lock
- Switchable Air Compressor for improved Fuel Economy
- Tachograph
- Rear Window
- Short Bumper

OPTIONAL EQUIPMENT

- Air Conditioner
- 6000 mm Wheelbase Version
- Aluminium Alloy Wheel
- Intarder
- ADR Pack
- Wet Type Cab Heater
- Cold Pack with Wet Type Cab Heater
- Power Cab Tilting
- Transmission Driven PTO Options & Interior Control Unit
- Engine Driven PTO & Interior Control Unit
- Automatic Traction Control
- Digital Tachograph